


**FPN 10-6000-2A**

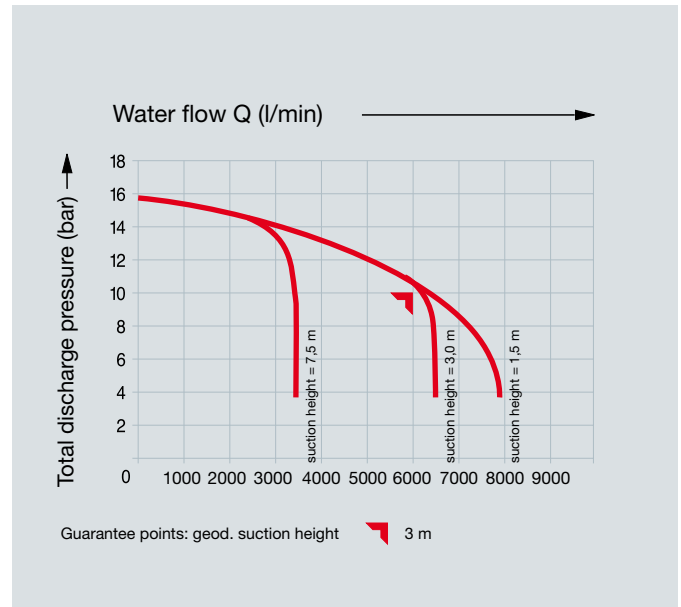

| Pump type     | Art. no. | Engine   | Pump output max. at 10 bar HS 3,0 m l/min | Weight approx. kg | Dimensions approx. LxWxH mm |
|---------------|----------|--|---|-------------------|-----------------------------|
| FPN 10-6000-2 | 1061795  | Mercedes-Benz Diesel engine Type OM 906 LA engine with 6 cylinders in line turbo-charged and charge-cooled water-cooled, 205 kW (280 HP) electric starter battery 12 V/88 Ah generator 28 V/80 A fuel tank approx. 160 l | 6000                                      | 2100              | 3400x1200x2000              |

**Basic equipment**

2stage centrifugal fire pump,  
2 suction inlets size A,  
6 delivery outlets size B with self-closing DIN-screw down valves,  
suction inlets and delivery outlets with blank cap.  
**Priming system:** fully automatic TROKOMAT PLUS with cover

**Auxiliary equipment and systems**

on request, additionally charged:  
suction inlet respectively delivery outlets on customer request  
automatic pressure governor (TOURMAT), tandem platform trailer  
acc. to art. no. 242489.

**Gauges and controls**

Pressure gauge and mano-vacuummeter.  
All instruments and switches for engine operation and control are integrated in an instrument box.

**Pump drive**

via joint shaft and electromagnetic clutch

**Paintwork**

basic frame black  
pump silver coloured RAL 9006  
cover red RAL 3000