


## Foam/Water turret BOA

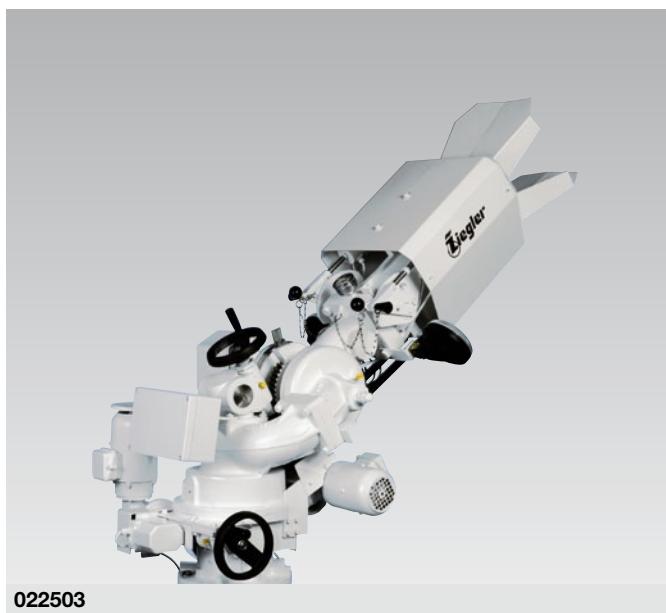

Turret pipe	combination pipe or multiple gallonage nozzle
Jet adjustment	deflector at combination pipe
Flow rate adjustment	100 % - 50 %
Operation turret pipe	electrically or manually emergency control via hand lever central cable duct connection 45° DIN or tank wagon flange up to 4000 l/min connection 90° with square flange from 4500 l/min
Operation turret body	electrically or manually emergency control via hand lever
Swivel range horizontally	330° at electrical operation 360° at manual operation
Swivel range vertically	-15° bis +60°
Options	searchlights (2 pcs.) proportional control position indication MAZ 4000 remote-control via joy-stick switchboard with control portable control panel support locking at combination pipe

Throw m					Weight Basic type approx. kg
Q (l/min) at 10 bar	4000	4500	5000	6000	142
Water	70	85	80	85	
Foam	60	65	70	75	