



Advancer FLF 60/100-11+450P+120 CO₂

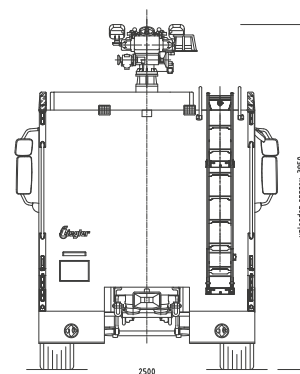

Chassis	MAN TGS 33.540 6×6 BB	
Engine type/Power	MAN D2676LF08 Euro 5 / 397 kW (540 HP)	
Wheelbase	4,200 mm	
Vehicle dimensions	L×W×H: 7,400 × 2,500 × 3,500 mm	
GVW/Axle load	30,000 kg / 9,000 kg front, 13,000 kg rear	
Norms/Standards	ICAO, NFPA, EN, StVZO	
Cabin/Crew	MAN L-Cab with sliding doors and SCBA bracket for co-driver / 1+1	
Superstructure	ALPAS	
Centrifugal fire pump	ZIEGLER FPN 10-6000-2M, PTO-driven, "pump & roll" possible	
Water tank	10,000 l	
Foam tank	1,100 l	
Turret	<ul style="list-style-type: none"> ▪ Roof turret ZW 40/20 ▪ Bumper turret ZW 10 	
Mixing system	ZIEGLER EAD	
Additional extinguishing systems	<ul style="list-style-type: none"> ▪ 450 kg dry powder system ▪ 120 kg CO₂ system 	
Special equipment	<ul style="list-style-type: none"> ▪ Sliding doors made by Toni Maurer ▪ Allison fully automatic gearbox ▪ Infrared camera system at bumper turret ▪ Reverse camera system 	

Illustrations may contain accessories and/or special equipment that are not part of the standard scope of delivery or service. Technical changes reserved. We cannot accept any liability for printing errors.

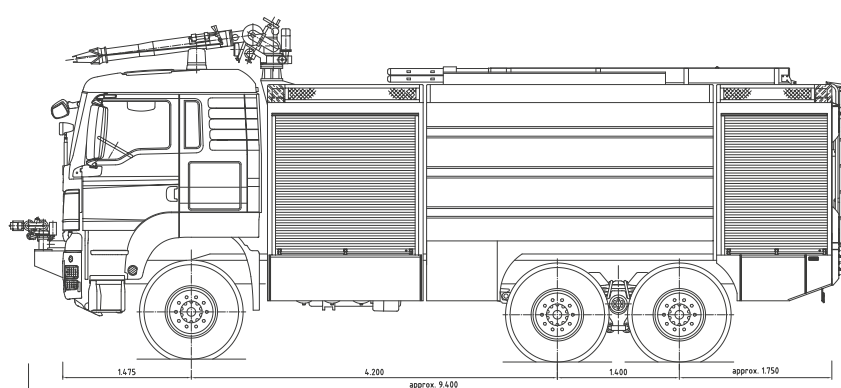

Albert Ziegler GmbH
 Albert-Ziegler-Strasse 1
 89537 Giengen/Brenz
 Germany

Phone +49 (0)7322 951-0
 Fax +49 (0)7322 951-211
 info@ziegler.de



We provide security.
www.ziegler.de